



STORAGE SHED

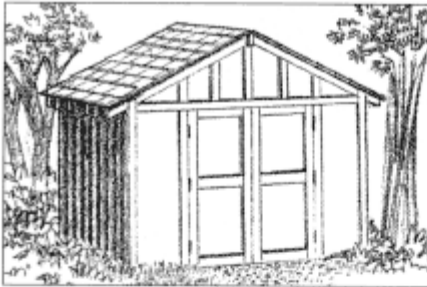

Storage Shed


Doors
Cut Double Doors from 2 sheets of 1/2" Wolmanized plywood and attach 1" x 4" Wolmanized trim as shown



Gable End Stud Detail
(2 Required)



End Stud Detail
(4 Required)




Rafters

Cut 14 rafters 6' 9 9/16" long from 2" x 4"s and nail to ridge beam blocks and ceiling joists





Ridge Beam Detail



Ceiling Joists

Toenail seven 2" x 4" x 10' joists along side wall top plates with 10d nails

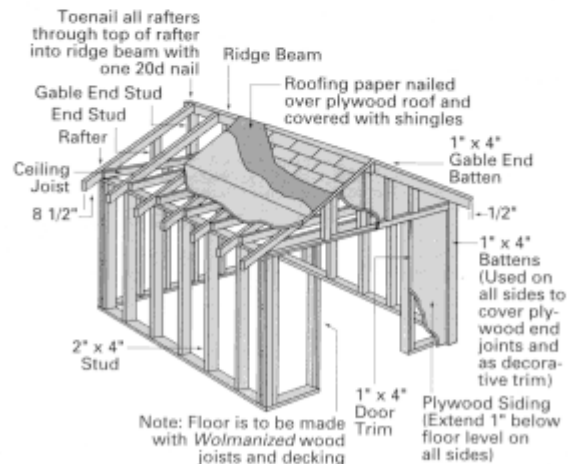

SHED

Lumber

Framing:

- ▲ (44) 2" x 4" - 8'
- ▲ (11) 2" x 4" - 10'
- ▲ (5) 2" x 4" - 12'

Ridge Beam:

- ▲ (1) 2" x 6" - 14'

Door Trim:

- ▲ (1) 1" x 4" - 8'
- ▲ (4) 1" x 4" - 10'

Doorway and Gable End Batten:

- ▲ (8) 1" x 4" - 8'
- ▲ (2) 1" x 4" - 6'

Batten Trim:

- ▲ (2) 1" x 4" - 10'
- ▲ (2) 1" x 4" - 12'
- ▲ (36) 1" x 4" - 8'

Wall, Roof, Door and Gable End Covering:
20 sheets 4' x 8' x 1/2" Exterior Plywood

Hardware and Other Materials

- ▲ 3d, 6d, 10d and 20d Nails as required
- ▲ Steel 'T' Door Hinges: 3 pr.
- ▲ Safety Hasp: 1 pc.
- ▲ Shingles: Sufficient amount for 170 sq. ft. Roof Area plus 13 ft. of Ridge and 26 ft. of Eaves

- ▲ Asphalt Roofing Paper: 2 rolls

- ▲ 7/16" Roofing Nails as required

FLOOR

Lumber

- ▲ (12) 4" x 4" - 4' Main Support Posts (length may vary according to terrain)
- ▲ (4) 2" x 8" - 12' Header Boards
- ▲ (2) 2" x 8" - 12' Fascia Ribbon Boards
- ▲ (2) 2" x 8" - 10' Fascia Ribbon Boards
- ▲ (8) 2" x 8" - 10' Joists
- ▲ (22) 5/4" x 6" - 12' Floor Decking

A. Rear Wall Framing

B. Front Wall Framing

C. Side Wall Framing

D. Floor Decking

E. Corner Post Assembly and Top View

